




Sparklite

Self Contained
Emergency Luminaire

► **BY-B2308U**

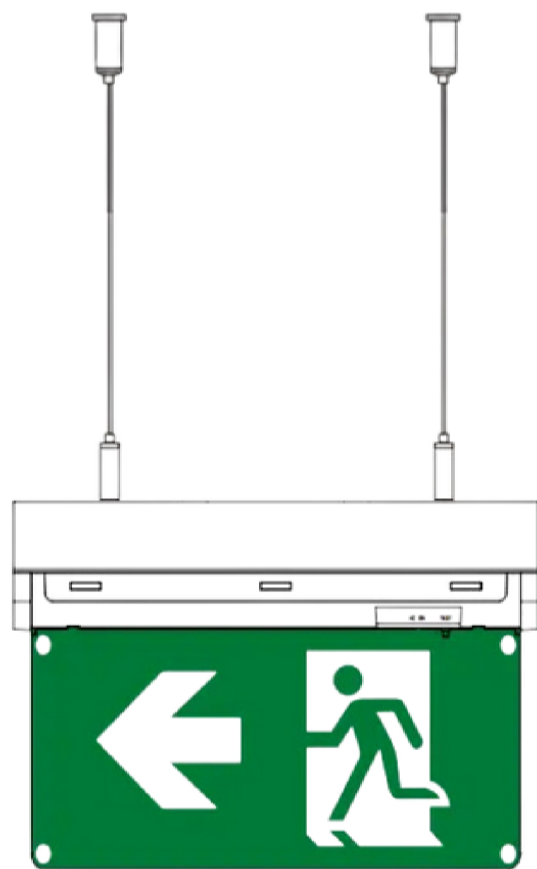

SPECIFICATION



- Input Voltage : AC220-240V AC/50-60Hz
- Mounting Method : Ceiling/Wall/Recessed
- Dimension : 348mmx264mmx42mm
- Battery : LFP 3.2V 1.5 Ah
- Operation Model : Maintained/Non- Maintained

- Emergency Time : $\geq 3H$
- Luminous Flux $\geq 22LM$
- IP Level : IP20
- Viewing Distance: 24m
- Certificate : UL 924
- Temperature Range : 0 - 40° C

